Harsh Limited
The Industrial Estate. Full Sutton. York. YO41 1HS
Tel: 01759 372100 Fax: 01759 371414
email: harsh@harshuk.com

QUOTATION


HARSH HS14T 4x2 Skiploader Equipment to suit 4x2 18t GVW

Thank you for your recent enquiry for the supply of our Skiploader equipment to your free issue 4x2 18t GVW chassis. I have pleasure in quoting you as follows: -

To Supply – Customer Requirements

- 4x2 18t GVW Rigid Chassis - DAF
- Fitted with Harsh HS14T Skiploader equipment
- Remote Control operation for Skiploader equipment
- Skip N Go Hydraulic Op to suit 16-yard skips
- Galvanised steel mesh next box
- Double leg chains – hook and key plates
- Finish Paint for Skiploader only
- ECWVTA approved

HS14T Skiploader Benefits

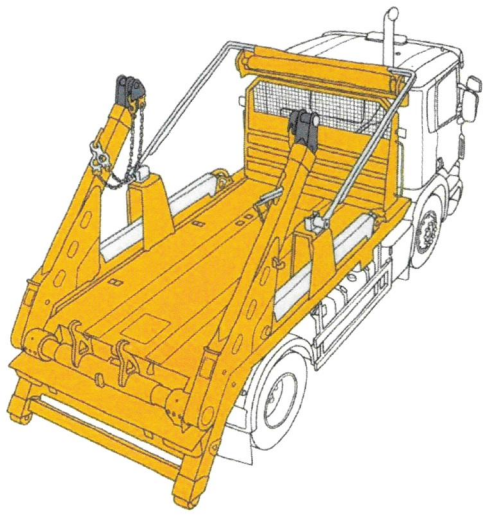

- 14 tonne lift capacity
- 10 tonne lift at full reach of 4250mm on telescopic arms
- Domex steel material build
- Standard equipment weight of 3150kgs
- Independent telescopic arms
- Integrates with Auto sheeting systems
- Built to CHEM TS16 standard
- Skiploader is suitable for 6-16 Cubic Yard Skips
- Skip N Go sheeting system suits up to 12 Cubic yard skips
- ECWVTA type approved

HARSH YouTube Channel – Check out our product videos for more info.
https://www.youtube.com/user/harshequipment

Harsh Limited
The Industrial Estate, Full Sutton, York, YO41 1HS
Tel: 01759 372100 Fax: 01759 371414
email: harsh@harshuk.com

HS14T Skiploader Specification

- HS14T Skiploader equipment includes Domex material build, independent telescopic arms, large diameter torsion bar, floor wear plates, external valve control c/w emergency stop, heavy duty ram protection guards, 6 x adjustable bin stops, pneumatic twin tip hooks, hydraulic oil tank, return filter, bent axis piston pump, thermo plastic mudguards, CE certification.
- Fast lift off for empty containers function
- Remote control operation for skiploader equipment
- Certified chains with two-hole key plates
- Flat Feet or Roller Jacks*
- Access ladder mounted on the passenger side
- Skip N Go electric sheeting system to suit up to 12-yard skips
- Single colour finish paint for Skiploader – RAL code to be provided on order confirmation
- 2nd Stage CoC certificate to comply with ECWVTA

Notes;

- *Chassis must come fitted with front park brake for Roller Jack installation*
- *Chassis to come with Factory Fitted PTO Unit*
- *The above applications may vary depending on truck type and model.*
- *For further information on installation layout, weights and payload calculations please consult Harsh technical for advice*
- *ECWVTA is a mandatory legal requirement for all vehicles registered after October 2014.*

Net Price Each per Unit
Fitted @ HARSH

HS14T Skiploader Optional Extras

Hardware Equipment Extras

- Chain protection covers (layflat hose)
- Thermo plastic toolbox

Weighing Equipment & Safety Devices

- PM Truckweigh (axle load sensing weighing) equipment =
- Reversing Camera =

Fitting Installation

- Fitting Installation is to a free issue rigid chassis @ Harsh
- Your equipment will be available ex-works from the Installation location for your collection once completed and payment terms agreed.

Harsh Limited
The Industrial Estate, Full Sutton, York, YO41 1HS
Tel: 01759 372100 Fax: 01759 371414
email: harsh@harshuk.com

HITS Service

- Harsh Improved Truck Support (HITS) provides aftersales support to all our customers using our products. Often tailored to suit your individual needs on request HITS provides that additional security and insurance policy.
- HS14T Skiploader comes complete with a 24-month warranty on all fabricated structural items and a 12-month parts and labour warranty on hydraulic components and sheeting system parts.
- Warranty is linked to the date of supply subject to our STD terms and conditions of sale
- Spare parts are available off the shelf and a next day courier service to anywhere in the UK is open daily.
- We have a complete nationwide network of trained Service Engineers including our own Service Team who are on hand to help.
- Harsh are ISO9001:2015 compliant and accredited by the British Standard Institute meaning we have fully audited systems giving us full traceability and process to ensure a quick, efficient support function.

HITS R&M Packages

- This additional level of Service is further encompassing and includes extended warranty options, full periodic service reports, onsite maintenance checks, as well as fully stock parts outlets. For further information on a tailor designed package to suit your business please just ask.

Order Information

- On receipt of your order we will require RAL reference number for Paint, confirmation of any additional options selected, along with chassis details / delivery dates. We will advise on a delivery date from confirmation.
- Delivery build slots/dates for new chassis equipment orders placed are currently available Build is typically 6-8 weeks from start to completion.

We trust this quotation meets with your approval and hope to receive your order soon. If you require any further information or technical support please do not hesitate to contact myself or Harsh at your earliest convenience

Notes:

- The above prices are ex-works and subject to VAT at the standard rate.
- This quotation is valid for a period of 60-days, but may be subject to change due to the continuing fluctuation of material, energy and fuel prices for the period between order confirmation and chassis delivery/production build in 2023/2024.
- Assuring you of the excellence of HARSH and our service at all times.

Yours sincerely,

Harry Hustler

HARSH YouTube Channel – Check out our product videos for more info.
https://www.youtube.com/user/harshequipment