


Actual Load

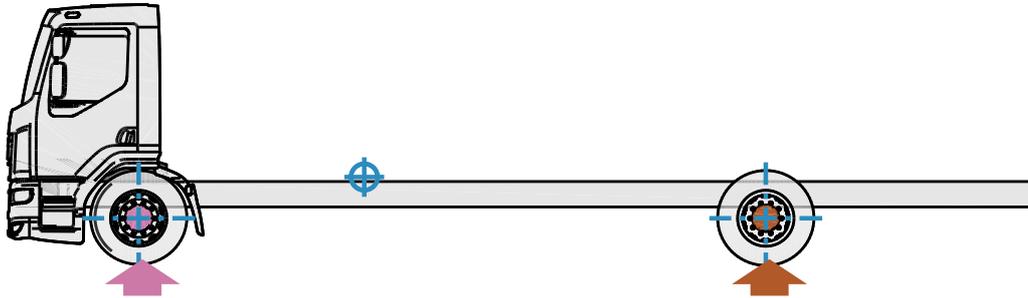

Truck load	CoG X [mm]	Front	Rear	Total
Truck chassis	2473	3279	1965	5244
Driver	9	150	0	150
Fuel	306 [l]	183	74	257
AdBlue®	0 [l]	45	14	59
Unladen (all axles down)	2374	3656 (64%)	2054 (35%)	5710
Maximum allowed load	-	7500	13000	19000
Margin	-	3844	10946	13290

Truck actual loads	Uniformly distributed load at GVW (EU1230/2012)
Front load	3656 [kg]
Rear load	2054 [kg]
Truck load	19000 [kg]

F5803AAAA

Front suspension type	Leaf
Rear suspension type	Air
Front tyre(s)	315/70R22.5GO AFMAXS 156/150 L Steering ABA
Leading axle	For rigids
Rear driven tyre(s)	External body length (BL) 0 [mm] 315/70R22.5GO AFMAXD 154/150 L Traction ACA
Trailing tyre	
Wheelbase (WB)	6600 [mm] Fifth wheel KA 0 [mm]
Rear overhang (AE)	2850 [mm]
Cab body distance (CB)	120 [mm]
Gross Vehicle Weight (GVW)	Max load non driven axle 13000 [kg]
Gross Combination Weight (GCW)	Max load driven axle 13000 [kg]
Down-plated GVW	Max load tandem/trailing axles 21000 [kg]
Down-plated GCW	Max load tridem 999999 [kg]
	Max GVM